



GD-LF5 Recess Linear





Type: _____
 Project: _____
 Catalog#: _____

Main Features

- Ultra miniature recessed LED Downlight
- Perfect combination of lens & reflector
- Superior glare control
- Trimless available
- Extruded aluminium alloy
- 1-10V Dimming



Technical Information

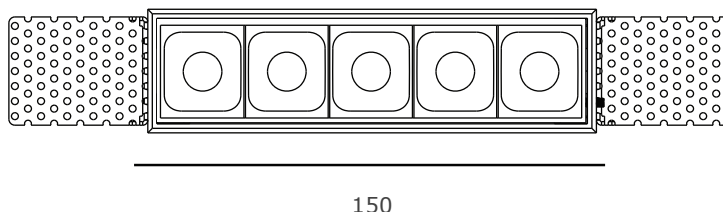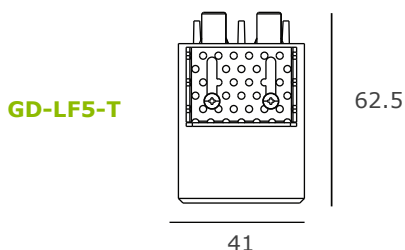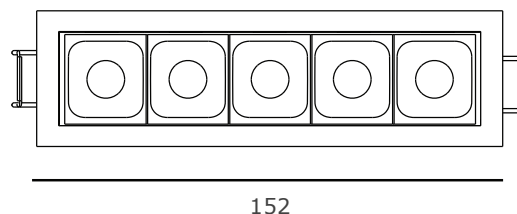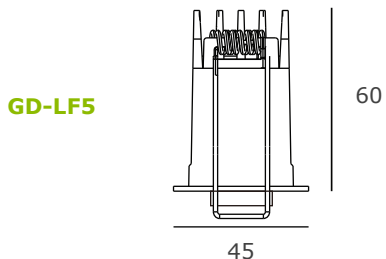

*All units in mm

Specification Features

Model	GD-LF5	GD-LF5-T
Lumen Output	800 - 850 lm	800 - 850 lm
Power Consumption	13W	13W
Input Voltage	16V	16V
Colour Temperature	2700K, 3000K, 3500K, 4000K	2700K, 3000K, 3500K, 4000K
CRI	Ra80, Ra90	Ra80, Ra90
Dimensions	45 x 152 x 60 mm	41 x 150 x 62.5 mm
Beam Angle	24°, 40°	24°, 40°
Certification	cETLus, CE	cETLus, CE
Warranty	5 Years	5 Years



Order Form

Series	Model	Colour Temperature	Beam Angle	Trim Colour	Secondary Reflector	Dimming Options
<input checked="" type="checkbox"/> GD	<input type="checkbox"/> LF5	<input type="checkbox"/> 2700K	<input type="checkbox"/> 24°	<input type="checkbox"/> Black	<input type="checkbox"/> Silver	<input type="checkbox"/> Non Dim
	<input type="checkbox"/> LF5-T	<input type="checkbox"/> 3000K	<input type="checkbox"/> 40°	<input type="checkbox"/> White	<input type="checkbox"/> White	<input type="checkbox"/> Phase Dim
		<input type="checkbox"/> 3500K			<input type="checkbox"/> Gold	<input type="checkbox"/> 1 - 10V
		<input type="checkbox"/> 4000K			<input type="checkbox"/> Black	<input type="checkbox"/> Dali