



GIT-P1-6070C Modular Circular Pendant

Type: _____
Project: _____
Catalog#: _____


Main Features

- Suspended direct curved luminaire
- Steel and aluminum housing
- 0-10V and phase dimmable
- Opal polycarbonate diffuser and silver braided power cable
- Epistar LEDs - 80 CRI
- Lifespan > 60,000 hours



Technical Information

GIT-P1-6070C

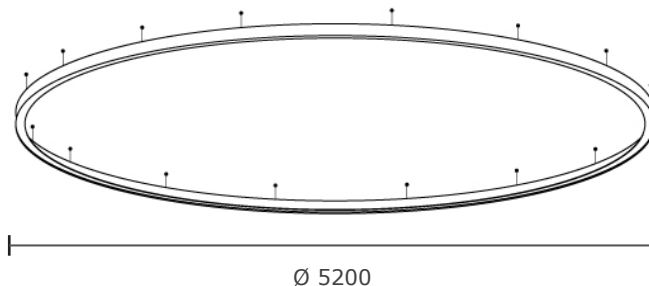

* All units in mm

Specification Features

Model	GIT-P1-6070C
Lumen Output	120 lm/ W
Power Consumption	15 W/ Ft
Input Voltage	120 V AC
Colour Temperature	3000K, 3500K, 4000K
CRI	> 80
Dimensions	Ø 5200 mm
IP	20
Certification	cETLus
Warranty	5 years

Order Form

Series	Model	Voltage	Colour Temperature	Diffuser	Dimming Option	Colour Option
<input checked="" type="checkbox"/> GIT-P1	<input type="checkbox"/> 6070C	<input type="checkbox"/> 120 V AC	<input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K	<input type="checkbox"/> Opal	<input type="checkbox"/> 0 - 10 V <input type="checkbox"/> Phase Dimming	<input type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Silver <input type="checkbox"/> Custom