



GG-CRLB Recessed Linear Inground Light

Type: _____
 Project: _____
 Catalog#: _____


Main Features

- Extruded powder coated aluminum housing
- Tempered frosted step glass
- Outdoor rated IP67
- TRIAC, 1-10V and DALI dimmable
- Hard chrome-plated stainless steel front cover
- Silicone sealed glass and housing
- Optical lens efficiency > 85%





Technical Information

GG-CRLB

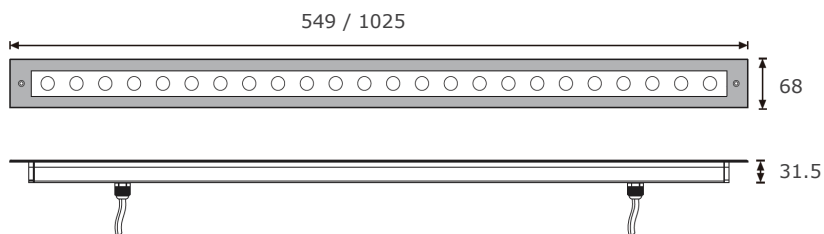

units in mm

Mounting Sleeve

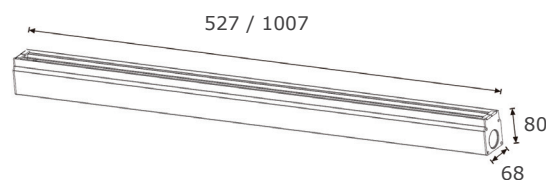

L: Symmetric
R: Asymmetric

Specification Features

Model	GG-CRLB12	GG-CRLB24
Lumen Output	1108 lm	2472 lm
Power Consumption	22W	44W
Colour Temperature (CCT)	2000K, 2700K, 3000K, 3500K, 4000K, 5000K	2000K, 2700K, 3000K, 3500K, 4000K, 5000K
Dimensions	549 x 68 x 31.5 mm	1025 x 68 x 31.5 mm
Input Voltage	24V DC, 120-240V AC	24V DC, 120-240V AC
IP Rated	67	67
Beam Angle	Symmetric: 20° or Asymmetric: 45° / 35°	Symmetric: 20° or Asymmetric: 45° / 35°
Certification	cETLus, RoHS, CE	cETLus, RoHS, CE
Warranty	5 Years	5 Years

Order Form

Series	Model	Voltage	Colour Temperature	Dimming	Beam Angle
<input checked="" type="checkbox"/> GG	<input type="checkbox"/> CRLB-12	<input type="checkbox"/> 24V DC	<input type="checkbox"/> 2000K <input type="checkbox"/> 3500K	<input type="checkbox"/> TRIAC	<input type="checkbox"/> Symmetric (20°)
	<input type="checkbox"/> CRLB-24	<input type="checkbox"/> 120-240V AC	<input type="checkbox"/> 2700K <input type="checkbox"/> 4000K	<input type="checkbox"/> 1-10V	<input type="checkbox"/> Asymmetric (45° / 35°)
			<input type="checkbox"/> 3000K <input type="checkbox"/> 5000K	<input type="checkbox"/> DALI	
				<input type="checkbox"/> None	