



## GS-50NFX1 LED Strip Lights

Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_


### Main Features

- Low voltage & high brightness
- Slim profile
- Comes in 5 meter rolls
- Can be cut into smaller units
- Dimmable with a driver
- 3M double sided adhesive tape
- 3-step MacAdam binning



### Technical Information

#### GS-50NFX1

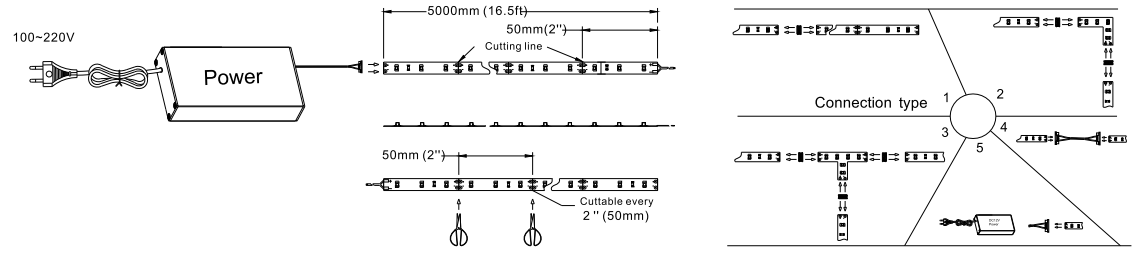

### Specification Features

Model	GS-50NFX1		
Lumen Output (lm)	2160 lm per roll	Dimensions (mm)	5000 x 8 x 3.2 mm
Efficacy	90	Weight (kg)	0.4 kg
Power Consumption	24W	IP	20
Colour Temperature	3000K, 3500K, 4000K, 5000K, Red, Green, Blue, RGB	Beam Angle	120°
CRI	80	Certification	cULus, CE, RoHS
Input Voltage	12V DC, 24V DC	LED Quantity	300
PFC	> .90	Warranty	5 Years

### Order Form

Series	Model	Length	Voltage	Colour	Driver (Non-Dim)	Dimmable
<input checked="" type="checkbox"/> GS	<input type="checkbox"/> NFX1	<input type="checkbox"/> 50 (5m)	<input type="checkbox"/> 12V DC <input type="checkbox"/> 24V DC	<input type="checkbox"/> 3000K (WW) <input type="checkbox"/> Red <input type="checkbox"/> 3500K (WW2) <input type="checkbox"/> Green <input type="checkbox"/> 4000K (NW) <input type="checkbox"/> Blue <input type="checkbox"/> 5000K (PW) <input type="checkbox"/> RGB <sup>1</sup>	<input type="checkbox"/> 48W AC/DC Adaptor <input type="checkbox"/> 60W Power Supply <input type="checkbox"/> 100W Power Supply <input type="checkbox"/> 150W Power Supply	<input type="checkbox"/> 40W Power Supply <input type="checkbox"/> 60W Power Supply <input type="checkbox"/> 96W Power Supply <input type="checkbox"/> 150W Power Supply

<sup>1</sup> Requires RGB Controller  
**Configuration:** Consult factory for instructions