



GDL-ADN-M Adjustable Down Light Module

Type: _____
Project: _____
Catalog#: _____


Main Features

- Simple assembly
- Accommodate scoop and adjustable down light fixtures
- 40% reduction in power consumption compared to traditional fixtures



Technical Information

GDL-ADN-M

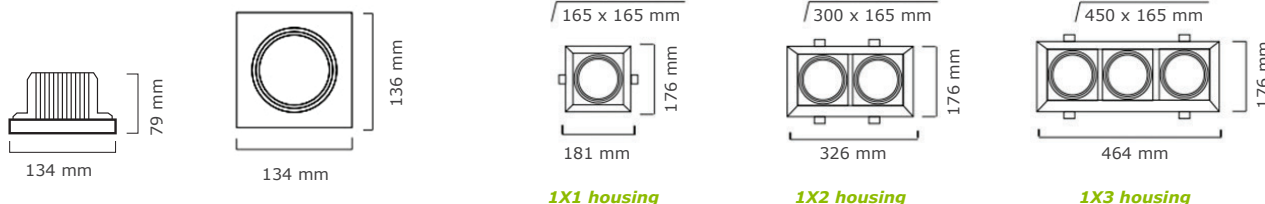

Specification Features

Model	GDL-26ADN-M	GDL-35ADN-M
Lumen Output	2350 lm	3000 lm
Efficacy	100 lm/W	100 lm/W
Power Consumption (W)	26W	35W
Colour Temperature (CCT)	3000K, 3500K, 4000K	3000K, 3500K, 4000K
CRI	80	80
Input Voltage	120V AC	120V AC
PFC	0.90	0.90
Dimensions (mm)	79 x 134 X 136 mm	79 x 134 X 136 mm
Weight	590 g	820 g
IP Rating	20	20
Beam Angle	15°, 25°, 38°	15°, 25°, 38°
Certification	cETLus, RoHS, CE	cETLus, RoHS, CE
Warranty	5 Years	5 Years

Order Form

Series	Model	Wattage	Voltage	Beam Angle	Colour	Fixture Option
<input checked="" type="checkbox"/> GDL	<input type="checkbox"/> ADN-M	<input type="checkbox"/> 26W <input type="checkbox"/> 35W	<input type="checkbox"/> 120V AC	<input type="checkbox"/> 15° <input type="checkbox"/> 25° <input type="checkbox"/> 38°	<input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K	<input type="checkbox"/> Black <input type="checkbox"/> White