



GD-TRC2060 LED Troffer

Type: _____
 Project: _____
 Catalog#: _____


Main Features

- Intended for indoor use
- Suitable for office units with T-bar ceilings
- Over 50,000 hours of life
- Anti-glare diffuser
- Excellent replacement for conventional fluorescent fixtures
- Comes with 0-10V dimming



Technical Information

GD-TRC2060

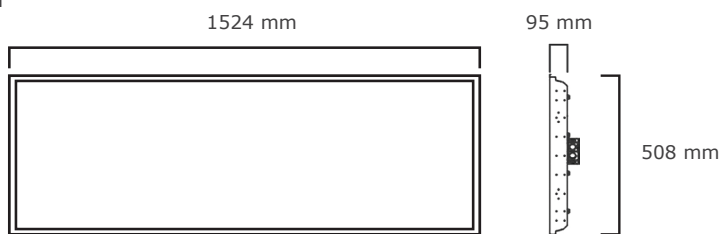

Specification Features

Model	GD-40TRC2060	GD-60TRC2060
Lumen Output	4858 lm	7705 lm
Efficiency	122	113
Power Consumption	40W	60W
Colour Temperature (CCT)	3000K, 3500K, 4000K	3000K, 3500K, 4000K
CRI	80	80
Input Voltage	100 ~ 277V AC, 347V AC	100 ~ 277V AC, 347V AC
PFC	0.95	0.95
Dimensions	508 x 1524 x 95mm	508 x 1524 x 95mm
IP	20	20
Light Distribution	120°	120°
Certification	cULus, RoHS, CE	cULus, RoHS, CE
Warranty	5 Years	5 Years

Order Form

Series	Model	Size	Wattage	Voltage	Colour	Options
<input checked="" type="checkbox"/> GD	<input type="checkbox"/> TRC2060	<input type="checkbox"/> 20" x 60"	<input type="checkbox"/> 40W <input type="checkbox"/> 60W	<input type="checkbox"/> 100-277V AC <input type="checkbox"/> 347V AC	<input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K	<input type="checkbox"/> Adv OCC Sensor <input type="checkbox"/> Emergency Backup