



GD-HD200R
LED Downlight

Type: _____
 Project: _____
 Catalog#: _____




Main Features

- Durable design with high efficiency and functionality
- Narrow, medium and flood beam angles
- Reflectors of matt, white and black colours
- Applicable to all typical downlight contexts, IP Rated

Technical Information

GD-HD200R

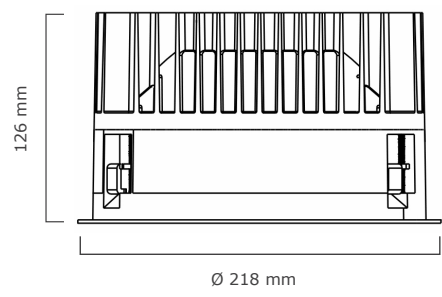

Specification Features

Model	<i>GD-HD200R-28</i>	<i>GD-HD200R-42</i>	<i>GD-HD200R-56</i>
LED Output	2800 - 3400 Lm	3900 - 4600 Lm	4800 - 5600 Lm
Input Voltage	120-277V AC; 347V AC	120-277V AC; 347V AC	120-277V AC; 347V AC
LED Power	28 W	42 W	56 W
LED Current	700 mA	1050 mA	1400 mA
CRI	>80; >90	>80; >90	>80; >90
Colour Temperature	2700K, 3000K, 3500K, 4000K	2700K, 3000K, 3500K, 4000K	2700K, 3000K, 3500K, 4000K
Beam Angle	18° / 30° / 60°	18° / 30° / 60°	18° / 30° / 60°
Dimensions	Ø 218 x 126 mm	Ø 218 x 126 mm	Ø 218 x 126 mm
IP	54	54	54
Certification	cETLus	cETLus	cETLus
Warranty	5 Years	5 Years	5 Years

Order Form

Series	Model	Wattage	Voltage	Beam Angle	Colour	CRI	Option	Reflector
✓GD-HD	<input type="checkbox"/> 200R-28 ¹	<input type="checkbox"/> 28W ¹	<input type="checkbox"/> 120-277V AC	<input type="checkbox"/> 18°	<input type="checkbox"/> 2700K	<input type="checkbox"/> 80	<input type="checkbox"/> TRIAC	<input type="checkbox"/> Matte
	<input type="checkbox"/> 200R-42 ²	<input type="checkbox"/> 42W ²	<input type="checkbox"/> 347V AC	<input type="checkbox"/> 30°	<input type="checkbox"/> 3000K	<input type="checkbox"/> 90	<input type="checkbox"/> 1-10V	<input type="checkbox"/> White
	<input type="checkbox"/> 200R-56 ³	<input type="checkbox"/> 56W ³		<input type="checkbox"/> 60°	<input type="checkbox"/> 3500K		<input type="checkbox"/> Dali Dim	<input type="checkbox"/> Black
					<input type="checkbox"/> 4000K			