

GG-07ABI - Adjustable Inground Light

Type: _____
 Project: _____
 Catalog #: _____




Main Features

- Adjustable light distribution
- Die-cast grey powder coated aluminum
- Chrome plated stainless steel cover
- Step tempered white coating glass
- TRIAC, PWM, DALI, 1-10V dimming

| Model | GG-07ABI |
|--------------------------|---------------------|
| Lumen Output | 700 |
| Power Consumption | 7.8W |
| Colour Temperature (CCT) | 3000K, 4000K |
| Input Voltage | 24V DC, 120/240V AC |
| Dimensions | Ø173 x 128 mm |
| IP | 67 |
| Beam Angle | 20° |
| Operating Temperature | -20°C-40°C |
| Certification | cETLus, CE, RoHS |
| Warranty | 5 Years |

Technical Information

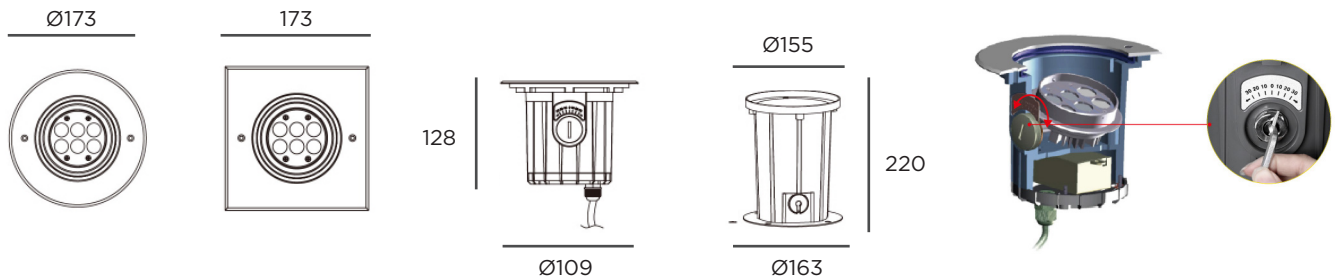

units in mm.

Order Form

| Series | Wattage | Model | Voltage | Colour |
|-----------------------------|------------------------------|------------------------------|--------------------------------------|--------------------------------|
| <input type="checkbox"/> GG | <input type="checkbox"/> 07W | <input type="checkbox"/> ABI | <input type="checkbox"/> 24V DC | <input type="checkbox"/> 3000K |
| | | | <input type="checkbox"/> 120/240V AC | <input type="checkbox"/> 4000K |