

GI-HBS Series - Ultra Cool High Bay

Type: _____
 Project: _____
 Catalog #: _____




Main Features

- Ultra cooling chimney structure design
- Alloy + tempered glass
- IP rated 65 for wet locations
- 5 control options available

| Model | GI-100HBS | GI-120HBS | GI-150HBS | GI-200HBS |
|-------------------------|----------------------|----------------------|----------------------|----------------------|
| Lumen | 15000 lm | 18000 lm | 22500 lm | 30000 lm |
| Wattage | 100W | 120W | 150W | 200W |
| Input Voltage | 100-277V AC | 100-277V AC | 100-277V AC | 100-277V AC |
| Color Temperature (CCT) | 5000K | 5000K | 5000K | 5000K |
| Dimensions | Ø350 x 154 mm | Ø350 x 154 mm | Ø350 x 154 mm | Ø350 x 170 mm |
| Beam Angle | 50°, 90°, 120° | 60°, 90°, 120° | 60°, 90°, 120° | 60°, 90°, 120° |
| IP | 65 | 65 | 65 | 65 |
| Certification | cULus, CE, RoHS, DLC | cULus, CE, RoHS, DLC | cULus, CE, RoHS, DLC | cULus, CE, RoHS, DLC |
| Warranty | 5 Years | 5 Years | 5 Years | 5 Years |

Technical Information

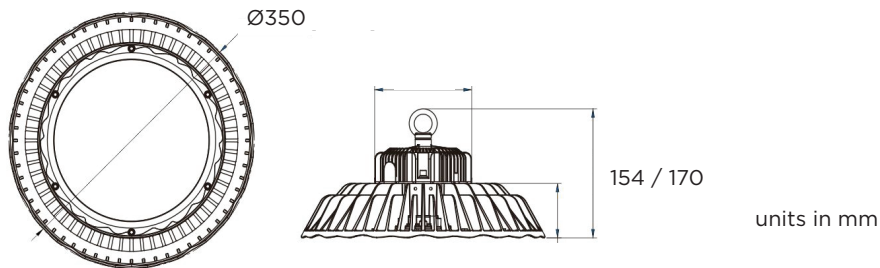

Order Form

| Series | Wattage | Model | Voltage | Color | Option |
|-----------------------------|-------------------------------|------------------------------|--------------------------------------|--------------------------------|---|
| <input type="checkbox"/> GI | <input type="checkbox"/> 100W | <input type="checkbox"/> HBS | <input type="checkbox"/> 120-277V AC | <input type="checkbox"/> 3000K | <input type="checkbox"/> Daylight Sensor |
| | <input type="checkbox"/> 120W | | <input type="checkbox"/> 347V AC | <input type="checkbox"/> 4000K | <input type="checkbox"/> Dimmable |
| | <input type="checkbox"/> 150W | | | <input type="checkbox"/> 5000K | <input type="checkbox"/> DALI |
| | <input type="checkbox"/> 200W | | | | <input type="checkbox"/> Microwave Sensor |
| | | | | | <input type="checkbox"/> ZigBee |