


Main Features

- 3.5 inch LED fixtures with round apertures
- Offers precision lighting for accent task and wall wash applications
- Separatable rotating reflector design
- Powder coated steel frame

Model	GP-12C35-NC	GP-15C35-NC	GP-20C35-NC
Lumen Output	1080 lm	1350 lm	1800 lm
Power Consumption	12W	15W	20W
Colour Temperature (CCT)	2700K, 3000K, 3500K, 4000K	2700K, 3000K, 3500K, 4000K	2700K, 3000K, 3500K, 4000K
Input Voltage	120-277V AC	120-277V AC	120-277V AC
Dimensions	287 x 428 x 205 mm	287 x 428 x 205 mm	287 x 428 x 205 mm
IP	20	20	20
Beam Angle	12°, 24°, 36°	12°, 24°, 36°	12°, 24°, 36°
Certification	cETLus	cETLus	cETLus
Warranty	5 Years	5 Years	5 Years

Technical Information

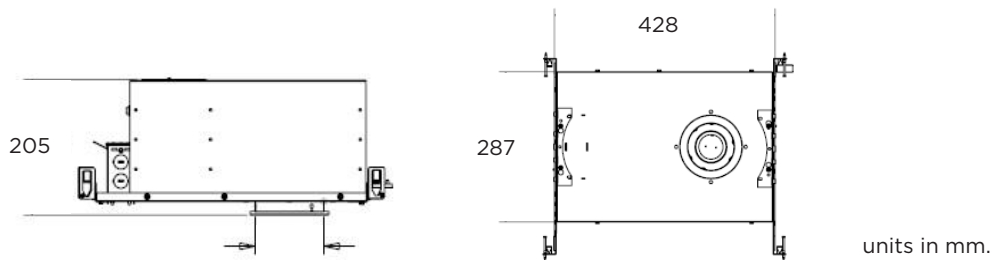

Order Form

Series	Wattage	Model	Voltage	Colour
<input type="checkbox"/> GP	<input type="checkbox"/> 12W	<input type="checkbox"/> C35-NC	<input type="checkbox"/> 120-277V AC	<input type="checkbox"/> 2700K
	<input type="checkbox"/> 15W			<input type="checkbox"/> 3000K
	<input type="checkbox"/> 20W			<input type="checkbox"/> 3500K
				<input type="checkbox"/> 4000K