



GS-50NFX1 LED Strip Lights

Type: _____
 Project: _____
 Catalog#: _____


Main Features

- Low voltage & high brightness
- Slim profile
- Comes in 5 meter rolls
- Can be cut into smaller units
- Dimmable with a driver
- 3M double sided adhesive tape
- 3-step MacAdam binning



Technical Information

GS-50NFX1

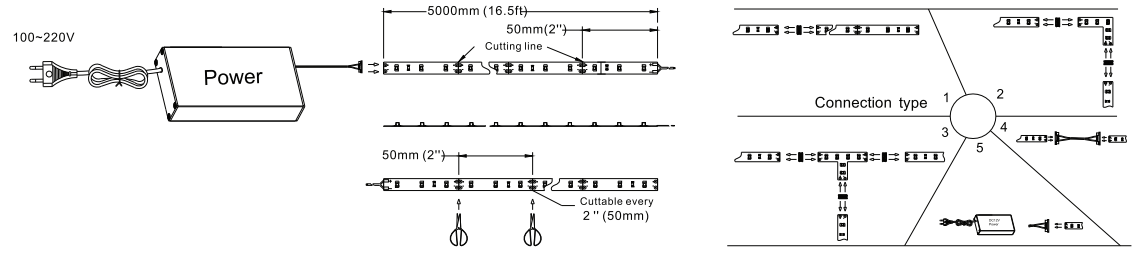

Specification Features

Model	GS-50NFX2		
Lumen Output (lm)	2160 lm per roll	Dimensions (mm)	5000 x 8 x 3.2 mm
Efficacy	90	Weight (kg)	0.4 kg
Power Consumption	24W	IP	20
Colour Temperature	3000K, 3500K, 4000K, 5000K, Red, Green, Blue, RGB	Beam Angle	120°
CRI	80	Certification	cULus, CE, RoHS
Input Voltage	12V DC, 24V DC	LED Quantity	300
PFC	> .90	Warranty	5 Years

Order Form

Series	Model	Length	Voltage	Colour	Driver
<input checked="" type="checkbox"/> GS	<input type="checkbox"/> NFX1	<input type="checkbox"/> 50 (5m)	<input type="checkbox"/> 12V DC	<input type="checkbox"/> 3000K (WW) <input type="checkbox"/> Red	<input type="checkbox"/> 24W AC/DC Adaptor <input type="checkbox"/> 100W Power Supply ²
			<input type="checkbox"/> 24V DC	<input type="checkbox"/> 3500K (WW2) <input type="checkbox"/> Green	<input type="checkbox"/> 48W AC/DC Adaptor <input type="checkbox"/> 150W Power Supply ²
				<input type="checkbox"/> 4000K (NW) <input type="checkbox"/> Blue	<input type="checkbox"/> 75W Power Supply <input type="checkbox"/> 300W Power Supply ²
				<input type="checkbox"/> 5000K (PW) <input type="checkbox"/> RGB ¹	

¹ Requires RGB Controller
² Dimmable version available
Configuration: Consult factory for instructions