



**GD-509UD**  
**Linear Luminaire**

Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_





**Main Features**

- Suited for indoor applications
- Surge protector
- Different colour temperatures can be selected
- Bilateral facing lights (up and down)


**Technical Information**

**GD-509UD**

**Pendant**



**Installation Instruction**

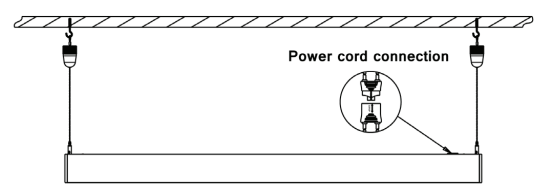

**Specification Features**

**Model**

**GD-509-UD**

Lumen Output	4400 lm
Power Consumption	40W (25W down, 15W up)
Colour Temperature (CCT)	3000k, 3500K, 4000K
CRI	> 80
Input Voltage	120 - 277V AC, 347V AC
PFC	> 0.95
Dimensions	1220 x 70 x 130 mm
Certification	cULus
Warranty	5 Years

**Order Form**

Series	Model	Wattage	Colour	Housing	Options
<input checked="" type="checkbox"/> GD	<input type="checkbox"/> 509UD	<input type="checkbox"/> 120-277V AC <input type="checkbox"/> 347V AC	<input type="checkbox"/> 3000K <input type="checkbox"/> 3500K <input type="checkbox"/> 4000K	<input type="checkbox"/> White <input type="checkbox"/> Black	<input type="checkbox"/> 1-10V Dimming <input type="checkbox"/> Occupancy Sensor <input type="checkbox"/> Daylight Harvesting <input type="checkbox"/> TRIAC Dimming <input type="checkbox"/> Emergency Backup