



## GD-CPN-02 LED Pendant Light

Type: \_\_\_\_\_  
Project: \_\_\_\_\_  
Catalog#: \_\_\_\_\_





### Main Features

- Functional housing with LED Driver inside
- Spot, narrow, or medium beam angles
- Optimized passive cooling system
- Decoration ring for various application
- Anti-glare accessory
- Black or white housing available

### Technical Information

#### GD-CPN-02

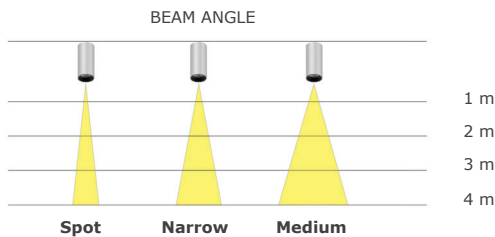

#### DECORATIVE RINGS



### Specification Features

Model	GD-CPN-02-15	GD-CPN-02-21
LED Output	1200 - 1300 Lm	1600 - 1700 Lm
Input Voltage	120-277V AC; 347V AC	120-277V AC; 347V AC
System Power	15 W	21 W
Light Source	COB Led Module	COB Led Module
CRI	>80; >90	>80; >90
Colour Temperature	2700K, 3000K, 4000K	2700K, 3000K, 4000K
Beam Angle	15° / 25° / 30°	15° / 25° / 30°
Dimensions	Ø 72 x 250 mm	Ø 72 x 250 mm
Certification	cETLus	cETLus
Warranty	5 Years	5 Years

### Order Form

Series	Model	Wattage	Voltage	Beam Angle	Colour	CRI	Housing	Decorative Ring
<input checked="" type="checkbox"/> GD-CPN	<input type="checkbox"/> 02	<input type="checkbox"/> 15W <input type="checkbox"/> 21W	<input type="checkbox"/> 120-277V AC <input type="checkbox"/> 347V AC	<input type="checkbox"/> 15° <input type="checkbox"/> 25° <input type="checkbox"/> 30°	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K	<input type="checkbox"/> 80 <input type="checkbox"/> 90	<input type="checkbox"/> Black <input type="checkbox"/> White	<input type="checkbox"/> Black <input type="checkbox"/> Gold <input type="checkbox"/> White