



## GWP-WMB301/601/801 Wall Packs

Type: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Catalog#: \_\_\_\_\_




### Main Features

- WMB Series full cutoff wall pack
- Can be adjustable from 0-90 degree
- IP 65 rated for damp location, rust and corrosion proof
- 10 kv surge production optional
- Photocell, motion sensor optional
- Over 50,000 hours of life
- Beam angle (H-V) is 100 ° -80 °

### Technical Information

#### GWP-WMB

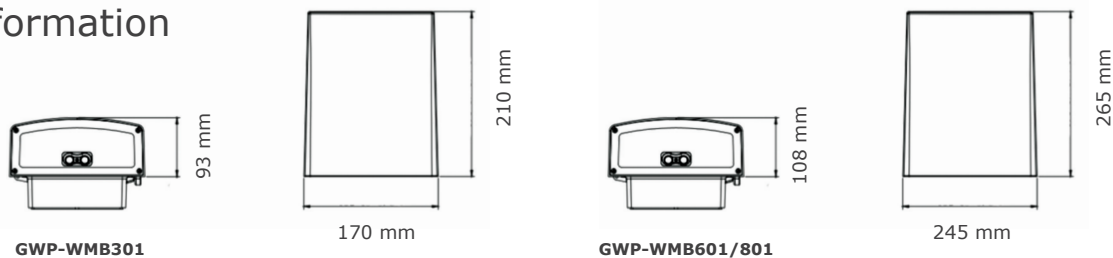

### Specification Features

Model	GWP-WMB301	GWP-WMB601	GWP-WMB801
Lumen Output	4200 lm	8400 lm	11200 lm
Power Consumption	30W	60W	80W
Efficacy (lm/W)	140 lm/w	140 lm/w	140 lm/w
Colour Temperature (CCT)	3000K, 3500K, 4000K, 5000K	3000K, 3500K, 4000K, 5000K	3000K, 3500K, 4000K, 5000K
CRI	80+	80+	80+
Input Voltage	100-277V AC; 347V AC	100-277V AC; 347V AC	100-277V AC; 347V AC
THD	< 13.5 % at full load	< 13.5 % at full load	< 13.5 % at full load
Weight (n.w. / g.w.)	1.6 kg / 1.8 kg	3.5 kg / 3.7 kg	3.7 kg / 3.9 kg
Dimensions	210 x 170 x 93 mm	265 x 245 x 108 mm	265 x 245 x 108 mm
Beam Angle (H-V)	100° - 80°	100° - 80°	100° - 80°
IP Rated	65	65	65
Certification	cULus, DLC	cULus, DLC	cULus, DLC
Warranty	5 Years	5 Years	5 Years

### Order Form

Series	Model	Wattage	Colour	Voltage	Mounting	Finish	Options
<input checked="" type="checkbox"/> GWP	<input type="checkbox"/> WMB301 <sup>1</sup>	<input type="checkbox"/> 30W <sup>1</sup>	<input type="checkbox"/> 3000K	<input type="checkbox"/> 100-277V AC	<input type="checkbox"/> Wall Mount	<input type="checkbox"/> Dark Bronze	<input type="checkbox"/> Photocell
	<input type="checkbox"/> WMB601 <sup>2</sup>	<input type="checkbox"/> 60W <sup>2</sup>	<input type="checkbox"/> 3500K	<input type="checkbox"/> 347V AC		<input type="checkbox"/> Black	<input type="checkbox"/> 0-10V Dimming
	<input type="checkbox"/> WMB801 <sup>3</sup>	<input type="checkbox"/> 80W <sup>3</sup>	<input type="checkbox"/> 4000K			<input type="checkbox"/> White	<input type="checkbox"/> Motion Sensor
			<input type="checkbox"/> 5000K				